

**Hex inverter****74F04****FEATURE**

- Industrial temperature range available  
(-40°C to +85°C)

TYPE	TYPICAL PROPAGATION DELAY	TYPICAL SUPPLY CURRENT ( TOTAL )
74F04	3.5ns	6.9mA

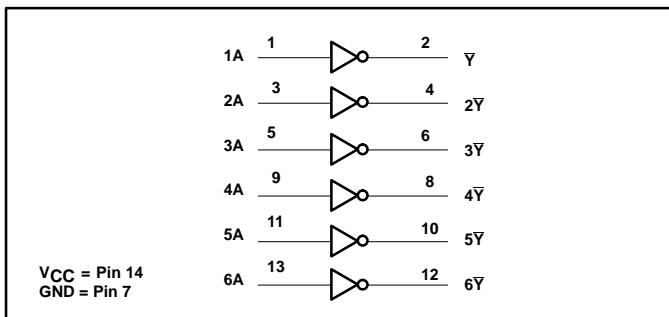
**ORDERING INFORMATION**

DESCRIPTION	ORDER CODE	
	COMMERCIAL RANGE $V_{CC} = 5V \pm 10\%$ , $T_{amb} = 0^\circ C$ to $+70^\circ C$	INDUSTRIAL RANGE $V_{CC} = 5V \pm 10\%$ , $T_{amb} = -40^\circ C$ to $+85^\circ C$
14-pin plastic DIP	N74F04N	I74F04N
14-pin plastic SO	N74F04D	I74F04D

**INPUT AND OUTPUT LOADING AND FAN OUT TABLE**

PINS	DESCRIPTION	74F (U.L.) HIGH/LOW	LOAD VALUE HIGH/LOW
nA	Data inputs	1.0/1.0	20µA/0.6mA
nY	Data output	50/33	1.0mA/20mA

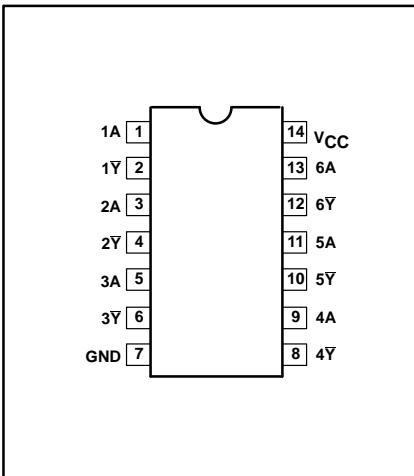
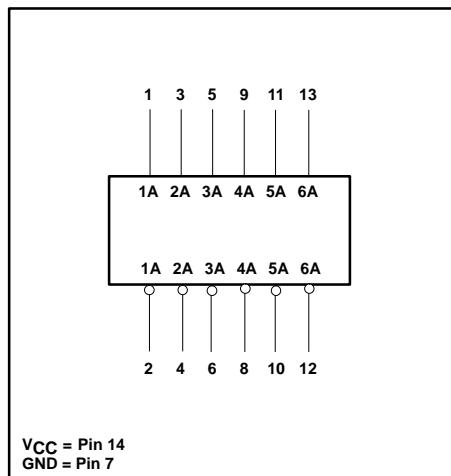
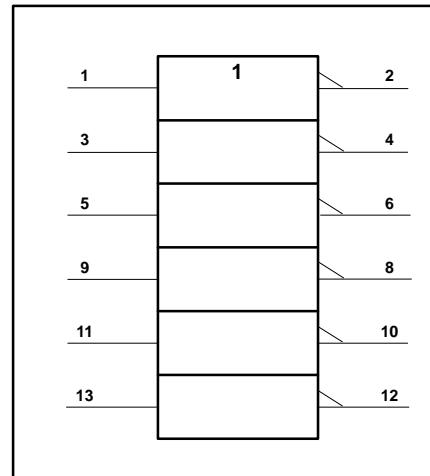
NOTE: One (1.0) FAST unit load is defined as: 20µA in the high state and 0.6mA in the low state.

**LOGIC DIAGRAM****FUNCTION TABLE**

INPUTS	OUTPUT
A	Y
L	H
H	L

**NOTES:**

1. H = High voltage level
2. L = Low voltage level

**PIN CONFIGURATION****LOGIC SYMBOL****IEC/IEEE SYMBOL**

## Hex inverter

74F04

**ABSOLUTE MAXIMUM RATINGS**

(Operation beyond the limit set forth in this table may impair the useful life of the device. Unless otherwise noted these limits are over the operating free air temperature range.)

SYMBOL	PARAMETER	RATING	UNIT	
$V_{CC}$	Supply voltage	-0.5 to +7.0	V	
$V_{IN}$	Input voltage	-0.5 to +7.0	V	
$I_{IN}$	Input current	-30 to +5	mA	
$V_{OUT}$	Voltage applied to output in high output state	-0.5 to $V_{CC}$	V	
$I_{OUT}$	Current applied to output in low output state	40	mA	
$T_{amb}$	Operating free air temperature range	Commercial range	0 to +70	°C
		Industrial range	-40 to +85	°C
$T_{stg}$	Storage temperature range	-65 to +150	°C	

**RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER	LIMITS			UNIT
		MIN	NOM	MAX	
$V_{CC}$	Supply voltage	4.5	5.0	5.5	V
$V_{IH}$	High-level input voltage	2.0			V
$V_{IL}$	Low-level input voltage			0.8	V
$I_{IK}$	Input clamp current			-18	mA
$I_{OH}$	High-level output current			-1	mA
$I_{OL}$	Low-level output current			20	mA
$T_{amb}$	Operating free air temperature range	0		+70	°C
		-40		+85	°C

**DC ELECTRICAL CHARACTERISTICS**

(Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS <sup>1</sup>		LIMITS			UNIT	
		MIN	TYP <sup>2</sup>	MAX				
$V_{OH}$	High-level output voltage	$V_{CC} = \text{MIN}$ , $V_{IL} = \text{MAX}$	$\pm 10\%V_{CC}$	2.5			V	
		$V_{IH} = \text{MIN}$ , $I_{OH} = \text{MAX}$	$\pm 5\%V_{CC}$	2.7	3.4		V	
$V_{OL}$	Low-level output voltage	$V_{CC} = \text{MIN}$ , $V_{IL} = \text{MAX}$	$\pm 10\%V_{CC}$		0.30	0.50	V	
		$V_{IH} = \text{MIN}$ , $I_{OI} = \text{MAX}$	$\pm 5\%V_{CC}$		0.30	0.50	V	
$V_{IK}$	Input clamp voltage	$V_{CC} = \text{MIN}$ , $I_I = I_{IK}$			-0.73	-1.2	V	
$I_I$	Input current at maximum input voltage	$V_{CC} = \text{MAX}$ , $V_I = 7.0V$				100	µA	
$I_{IH}$	High-level input current	$V_{CC} = \text{MAX}$ , $V_I = 2.7V$				20	µA	
$I_{IL}$	Low-level input current	$V_{CC} = \text{MAX}$ , $V_I = 0.5V$				-0.6	mA	
$I_{OS}$	Short-circuit output current <sup>3</sup>	$V_{CC} = \text{MAX}$		-60		-150	mA	
$I_{CC}$	Supply current (total)	$I_{CCH}$	$V_{CC} = \text{MAX}$	$V_{IN} = \text{GND}$		2.8	4.2	mA
		$I_{CCL}$	$V_{CC} = \text{MAX}$	$V_{IN} = 4.5V$		10.2	15.3	mA

**NOTES:**

- 1.. For conditions shown as MIN or MAX, use the appropriate value specified under recommended operating conditions for the applicable type.
- 2.. All typical values are at  $V_{CC} = 5V$ ,  $T_{amb} = 25^{\circ}\text{C}$ .
- 3.. Not more than one output should be shorted at a time. For testing  $I_{OS}$ , the use of high-speed test apparatus and/or sample-and-hold techniques are preferable in order to minimize internal heating and more accurately reflect operational values. Otherwise, prolonged shorting of a high output may raise the chip temperature well above normal and thereby cause invalid readings in other parameter tests. In any sequence of parameter tests,  $I_{OS}$  tests should be performed last.

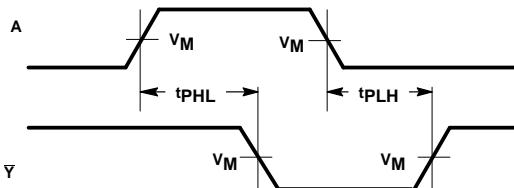
## Hex inverter

74F04

## AC ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITION	LIMITS						UNIT	
			$T_{amb} = +25^{\circ}\text{C}$			$T_{amb} = 0^{\circ}\text{C}$ to $+70^{\circ}\text{C}$		$T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		
			$V_{CC} = +5.0\text{V}$	$C_L = 50\text{pF}$ , $R_L = 500\Omega$	$V_{CC} = +5.0\text{V} \pm 10\%$	$C_L = 50\text{pF}$ , $R_L = 500\Omega$	$V_{CC} = +5.0\text{V} \pm 10\%$	$C_L = 50\text{pF}$ , $R_L = 500\Omega$		
$t_{PLH}$ $t_{PHL}$	Propagation delay A to Y	Waveform 1	MIN 2.4 1.5	TYP 3.7 3.2	MAX 5.0 4.3	MIN 2.4 1.5	MAX 6.0 5.3	MIN 1.5 1.1	MAX 8.0 6.5	ns

## AC WAVEFORMS

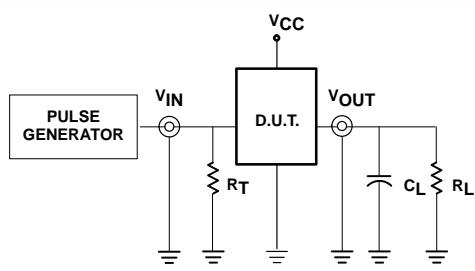


Waveform 1. Propagation delay for inverting outputs

## Note to AC Waveforms

- For all waveforms,  $V_M = 1.5\text{V}$ .

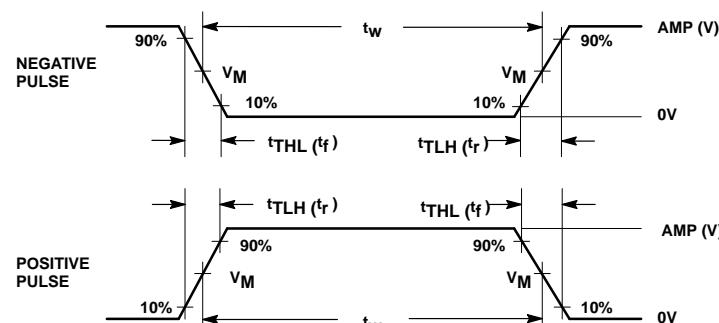
## TEST CIRCUIT AND WAVEFORMS



Test circuit for totem-pole outputs

## DEFINITIONS:

- $R_L$  = Load resistor;  
see AC electrical characteristics for value.  
 $C_L$  = Load capacitance includes jig and probe capacitance;  
see AC electrical characteristics for value.  
 $R_T$  = Termination resistance should be equal to  $Z_{OUT}$  of  
pulse generators.



Input pulse definition

family	INPUT PULSE REQUIREMENTS					
	amplitude	$V_M$	rep. rate	$t_W$	$t_{TLH}$	$t_{THL}$
74F	3.0V	1.5V	1MHz	500ns	2.5ns	2.5ns